

SELF-CONTAINED BREATHING APPARATUS MODEL: NFPA-SCBA

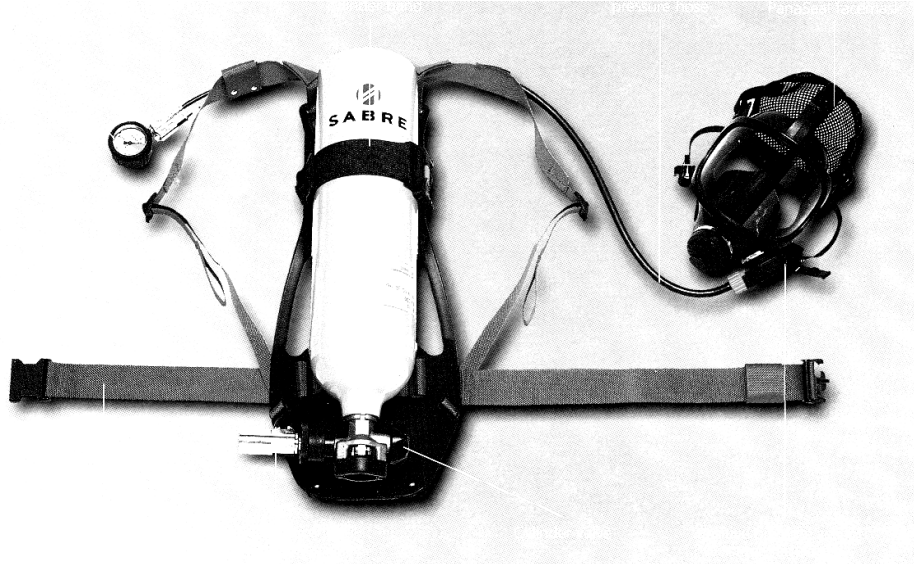


Fig.1- NFPA-SCBA

FEATURES:

- Primary alarm, 1st Stage Continuous Whistle
- Secondary Alarm, Analog gauge with Visual alarm
- Compact Low Profile Second Stage Regulator with First Breath On
- Nomex/Kevlar Backpack Harness
- Backpack with Hip Wings, Hip Pad, and Padded Lumbar Support
- Face piece with Five Strap Head Harness; Speaking Diaphragm
- 30 Minute Aluminum Cylinder, 2216 psig

TYPICAL APPLICATIONS:

- Mechanical Rooms
- Confined Spaces
- Industrial Processes
- Hazardous Locations

GENERAL DESCRIPTION:

NFPA-SCBA is a Self-Contained Positive Pressure Breathing Apparatus manufactured and approved to the latest NIOSH and other agency standards. The NFPA-SCBA unit provides optimum reliability at low cost. ASHRAE (15-1994), OSHA, and other regulatory agencies require or recommend having such a unit available at hazardous locations where there is a risk of oxygen depletion or conditions of toxic gas build-up due to the leakage of compressed gases or other chemicals.

(Cont.)

The combined pressure reducer and cylinder connector assembly features only two moving parts to ensure efficiency and reliability. The fully automatic operation of the reducer requires no adjustment when using cylinders up to 4500 psi.

The shoulder mounted pressure indicator and warning whistle assembly features photoluminescent face markings for low light legibility and a heavy-duty stainless steel case with additional rubber shroud. The warning whistle indicates when 25% cylinder air is remaining.

All NFPA-SCBA breathing apparatus components are designed to be user serviceable, requiring the minimum of special skills and equipment.

NFPA-SCBA ORDERING INFORMATION

NFPA-SCBA Standard NFPA approved Self-Contained Breathing apparatus (SCBA)

Accessories for Standard NFPA Type SCBA

SCBAWALLCASE	SCBA Wallmount Cabinet
SCBACARRYCASE	Carrying Case for NFPA SCBA
NFPAVIDEO	Training Video for NFPA SCBA
SPECTACLEKIT	Classic Spectacle Kit for NFPA SCBA
BUDDY	Buddy Breather for NFPA SCBA
30ATANK2216	Spare 30 minute aluminum cylinder, 2216 psig
30FTANK2216	Spare 30 minute hoop wrapped fiberglass, 2216 psig
30FTANK4500	Spare 30 minute hood wrapped fiberglass, 4500 psig
45FTANK4500	Spare 45 minute fully wrapped fiberglass, 4500 psig
60FTANK4500	Spare 60 minute fully wrapped fiberglass, 4500 psig

**Refer to INDUST-SCBA Data Sheet for information on our Industrial-Grade Self-Contained Breathing Apparatus*

NFPA-SCBA