

## Explosion-Proof Vibrating Horns

Models 31X and 41X

### DESIGNED FOR USE IN EXPLOSION-PROOF ATMOSPHERES

- Corrosion-resistant cast aluminum housings
- Produces 100dB @ 10' (110dB @ 1m)
- UL and cUL Listed, CSA Certified
- Type 4X enclosure


These explosion-proof vibrating horns are constructed for safe use in hazardous environments. They are enclosed in heavy-duty copper-free cast aluminum housings tapped for 3/4" conduit.

Federal Signal Models 31X and 41X are corrosion-resistant vibrating horns with stainless steel diaphragms. Model 41X is available in 24VDC. The Model 31X is available in 120VAC and 240VAC and features an internal volume control.

The 31X and 41X models are UL and cUL Listed (Underwriters Laboratories) for Class I, Division 1, Groups C & D; Class II, Division 1, Groups E, F, and G; and Class III. Both are CSA (Canadian Standards Association) Certified. A five minute duty cycle applies to both models.

Model	Voltage	Operating Current	Decibels @	
			10'	1m
31X	120VAC 50/60Hz	0.20 amps	100	110
31X	240VAC 50/60Hz	0.10 amps	100	110
41X	24VDC	1.20 amps	100	110

## EXPLOSION-PROOF HORNS (31X/41X)

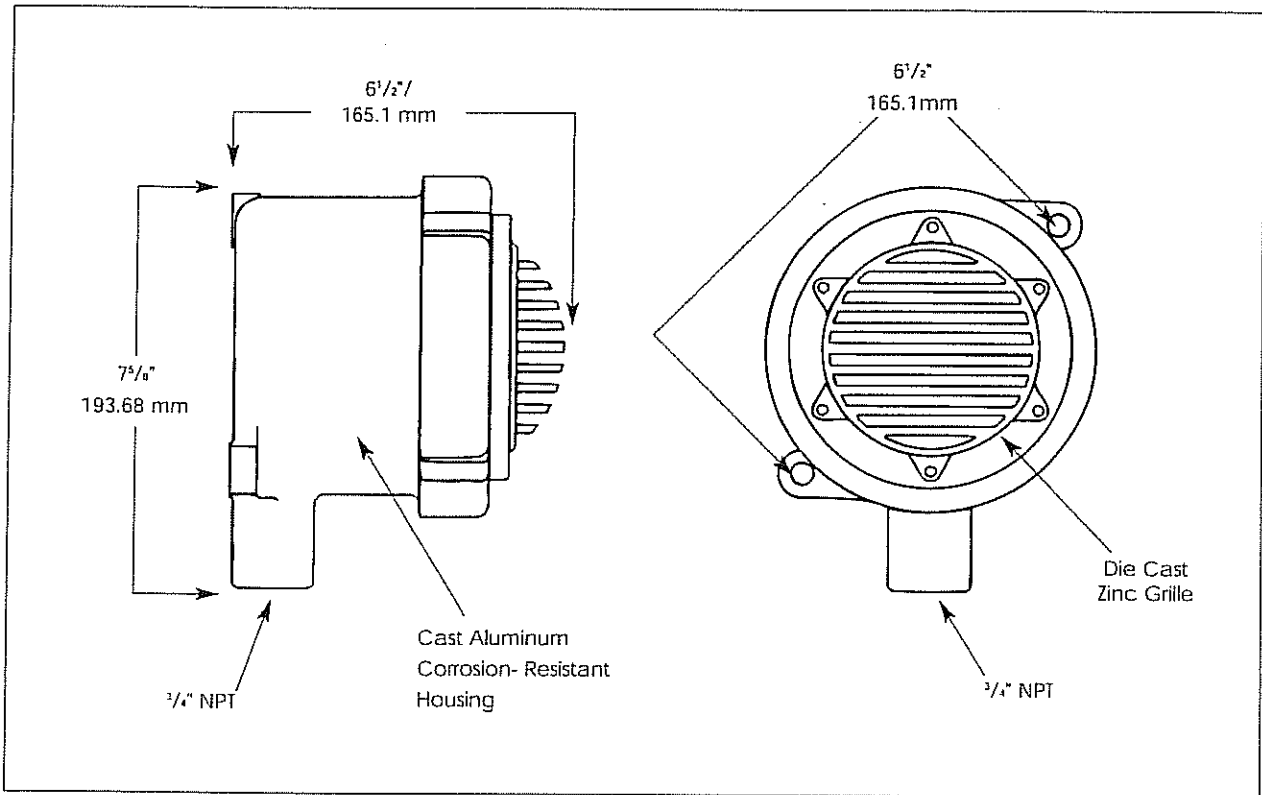

### SPECIFICATIONS

Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:		
31X	7.5 lbs.	3.4 kg
41X	9.0 lbs.	4.1 kg
Shipping Weight:		
31X	8.1 lbs.	3.7 kg
41X	10.3 lbs.	4.7 kg
Height:		
31X	7.63"	193.8 mm
41X	7.63"	193.8 mm
Depth:		
31X	6.5"	165.1 mm
41X	6.5"	165.1 mm
Diameter:		
31X	6.5"	165 mm
41X	6.5"	165 mm

### HOW TO ORDER

- Specify model and voltage
- Please refer to Model Number Index 31X/41X beginning on page 378